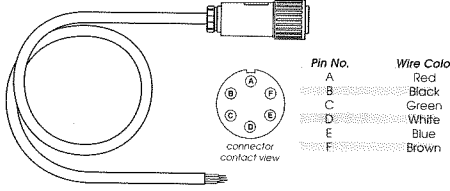







Accessories

Electrical Interconnect Cable Assembly	specifications	transducer series	order number
	<p>6-pin plug mates to MS3102E-14S-6P with 15-ft. long 6-conductor shielded 24 AWG multiconductor cable.</p>	<p>PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000</p>	<p>9603513-0015 <i>(plastic connector)</i></p> <p>9603924-0015 <i>(metal connector)</i></p>
6-pin 90° Mating Plug			
	<p>6-pin, 90-degree metal mating plug. mates to MS3102E-14S-6P</p>	<p>PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000</p>	<p>9036810-0018</p>
6-Pin Plastic Mating Plug			
	<p>6-pin, plastic mating plug. mates to MS3102E-14S-6P</p>	<p>PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000</p>	<p>9036830-0001</p>
6-Pin Metal Mating Plug			
	<p>6-pin, metal mating plug. mates to MS3102E-14S-6P</p>	<p>PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000</p>	<p>9036810-0001</p>
18-Pin Plastic Mating Plug			
	<p>18-pin, plastic mating plug. mates to Conxall 1482-18PG-300-K</p>	<p>DPT250, PT5E, PT8150 and PT9150 only. <i>Used for Line Driver Option w/Index Channels</i></p>	<p>9036820-0003</p>
Extension / Leader Cable Assemblies		<i>description</i>	
	<p>Extension cable enables the position transducer to be mounted away from the range of measurement.</p>	<p>.019-inch nylon-coated stainless steel cable assembly</p>	<p>9603969-XXXX</p>
		<p>.034-inch nylon-coated stainless steel cable as-</p>	<p>9603740-XXXX</p>