

Cable Grips


multiple Cable Grip



galvanized steel
handwoven
available in stainless steel

cable-Ø (mm)	breaking load (kN)	pulling force (kN)	weight (kg)	W 900 mm art.-no.
4 x 21 - 30	22.6	11.3	1.33	108603
3 x 20 - 29	22.6	11.3	1.20	108604
3 x 30 - 39	37.0	18.5	1.50	108600
3 x 40 - 49	55.0	27.5	2.55	108601
3 x 50 - 65	55.0	27.5	2.65	108605

single eye

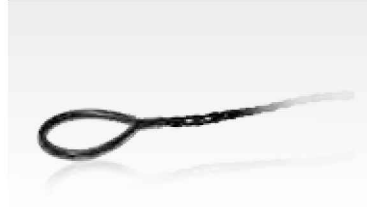

synthetic cord (with kevlar)
non conductive
antimagnetic
non corrosive

cable-Ø (mm)	breaking load (kN)	pulling force (kN)	weight (kg)	weave	W 600 mm art.-no.
10 - 20	11.2	0.56	0.06	single	108300
20 - 30	16.8	0.84	0.08	single	108301
30 - 40	22.4	1.12	0.11	single	108302
40 - 50	27.0	1.35	0.12	single	108303
50 - 65	71.6	3.58	0.22	double	108304
65 - 80	71.6	3.58	0.28	double	108305
80 - 100	71.6	3.58	0.29	double	108306

double eye



synthetic cord (with kevlar)
non conductive
antimagnetic
non corrosive

cable-Ø (mm)	breaking load (kN)	pulling force (kN)	weight (kg)	weave	W 600 mm art.-no.
10 - 20	11.2	0.56	0.06	single	108310
20 - 30	16.8	0.84	0.09	single	108311
30 - 40	22.4	1.12	0.17	double	108312
40 - 50	27.0	1.35	0.22	double	108313
50 - 65	71.6	3.58	0.26	double	108314
65 - 80	71.6	3.58	0.32	double	108315
80 - 100	71.6	3.58	0.34	double	108316

single lateral eye



synthetic cord (with kevlar)
non conductive
antimagnetic
non corrosive

cable-Ø (mm)	breaking load (kN)	pulling force (kN)	weight (kg)	weave	W 600 mm art.-no.
10 - 20	11.2	0.56	0.06	single	108320
20 - 30	16.8	0.84	0.08	single	108321
30 - 40	22.4	1.12	0.11	single	108322
40 - 50	27.0	1.35	0.12	single	108323
50 - 65	71.6	3.58	0.23	double	108324
65 - 80	71.6	3.58	0.29	double	108325
80 - 100	71.6	3.58	0.33	double	108326